

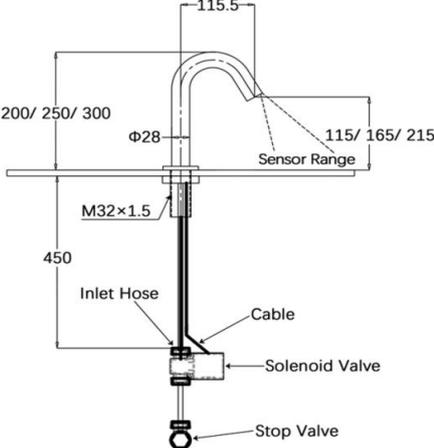


BESTWARE HARDWARE PRODUCTION CO., LTD.

Block 8, No. 6, Jianda Nan Road, Jiangmen, Guangdong, China

Tel. 86-750-3108801 Web: www.bestware.net.cn

TECHNICAL DATA SHEET

| | Photo | Dimension |
|----------------|---|--|
| Product |  |  |

DESCRIPTION

Item No: ST200B / ST250B / ST300B

Designation: Touch-Free deck mount tap

Feature:

- Infrared activated tap
- Battery powered
- Vandal-resistant faucet body with chrome plated, solid brass construction
- Aggressive spray at low flow rate
- Suitable for reflective surfaces with unique sensor design

TECHNICAL DATA

- Drill hole: 35mm
- Sensor range: 8~14cm
- Battery supply: 2x CR123 (3V lithium battery) = 6V
- Plug Power supply: DC6V (Plugs can be adjusted according to different countries)
- Water saving up to 30% with Neoperl aerator

SENSOR RANGE ADJUSTMENT

Remove or disconnect the power supply (battery or mains) and leave it for 1 min. Reconnect again and immediately place hand at 4~6cm away from the sensor within 5 seconds when power on, until its light stops flashing. The sensor distance is set.

IMPORTANT NOTE

- Recommend working pressure is 1 to 8 bar.
- Resistant to temperature from 5°C to 65°C.
- Please change the battery when indicating light flash and stop using.
- Keep sensor away from direct sunlight to avoid damage.
- Please install by a qualified technician in accordance with manufacturer's instructions and local regulations.